

FINISH SCHEDULE				
SYMBOL	CODE	ITEM	DESCRIPTION	REMARKS
B-1	RUBBER BASE	MANUFACTURER:	JOHNSONITE	
		COLOR:	TO MATCH EXISTING	
		SIZE:	4" H COVE	
B-2	WOOD BASE (TO MATCH EXISTING)	MANUFACTURER:		
		ITEM:	EASTERN WHITE MAPLE HARDWOOD TRIM	
		COLOR:	RUDD ALPINE COLOR WIPING STAIN BY SHERWIN WILLIAMS	
C-1	CARPET MODULAR	MANUFACTURER:	PATCRAFT	
		STYLE/COLOR:	10060 - SPLASH AND 60309 - PLOP	
		INSTALLATION TYPE:	MODULAR, TBD	
L-1	PLASTIC LAMINATE	MANUFACTURER:	FORMICA	
		PATTERN/COLOR:	TBD	
		INSTALLATION TYPE:	COUNTERTOPS AS SPECIFIED	
P-1	PAINT (OFFICE WALLS)	MANUFACTURER:	SHERWIN WILLIAMS	GENERAL PAINT TO MATCH EXISTING ON ALL NEW WALLS IN OFFICES
		COLOR:	CUSTOM MANUAL MATCH	
		SHEEN:	EGG SHELL	
P-2	PAINT (CORRIDOR WALLS)	MANUFACTURER:	SHERWIN WILLIAMS	GENERAL PAINT TO MATCH EXISTING ON ALL NEW WALLS IN CORRIDORS
		COLOR:	CUSTOM MANUAL MATCH	
		SHEEN:	EGG SHELL	
P-4	PAINT (TRIM)	MANUFACTURER:	SHERWIN WILLIAMS	TOUCH-UP PAINT ON RELOCATED HOLLOW METAL DOOR FRAMES. USE THIS COLOR ON ALL NEW HOLLOW METAL FRAMES & RELITES.
		COLOR:	NB-1398-15, VCA 15031	
		SHEEN:	SEMI-GLOSS	
WC-2	WALL COVERING	MANUFACTURER:	MARLITE	FURNISHED BY OWNER
		PATTERN/COLOR:	N.A.	SEE 2 & 3/A5.02 & 2/A8.03 FOR LOCATION OF INSTALL. ADDITIONAL LOCATIONS SHOWN IN CASEWORK DETAILS
		INSTALLATION TYPE:	WOOD WALL PANEL	

ROOM FINISH MATRIX										
RM #	ROOM NAME	FLOORS		WALLS				CEILING		NOTES
		FLOOR	BASE	WEST	NORTH	EAST	SOUTH	HEIGHT	FINISH	
133	OFFICE	C-1	B-1	P-1	P-1	P-1	P-1	9'-0"	ACT	
134	HALL	-	B-1 & B-2	P-2	-	-	-	EXISTING	-	PAINT & PROVIDE NEW BASE @ WEST WALL. SEE 2D/A5.02 MODIFY (E) CEILING GRID
136	OPEN OFFICE	C-1	B-1	P-1	P-1	P-1	P-1	9'-0"	ACT	
137A	OFFICE	C-1	B-1	P-1	P-1	P-1	P-1	9'-0"	ACT	
138	HALL	C-1	B-1	P-1	P-1	P-1	P-1	9'-0"	ACT	
139	HALL	C-1	B-1	-	P-1	P-1	P-1	9'-0"	ACT	
140	DISPATCH	C-1	B-1	P-1	P-1	P-1	P-1	9'-0"	ACT	
145	HALL	-	-	-	-	P-2	-	EXISTING	-	REPAINT WALL WHERE REQUIRED AFTER INSTALLATION OF RELITE. MATCH EXISTING PAINT COLOR.


**GENERAL NOTES**

REMOVE AND REINSTALL WOOD BASE WHERE REQUIRED FOR INSTALLATION OF NEW CARPET.

IN ALL AREAS RECEIVING NEW CARPET, REMOVE ALL RUBBER BASE AND REPLACE WITH B-1 OR B-2.


PROVIDE NEW RUBBER BASE ALONG WEST WALL OF HALL 134 AND NEW WOOD BASE WHERE CALLED OUT ON DRAWINGS.

ALL RELOCATED HOLLOW METAL DOOR FRAMES AND NEW HOLLOW METAL DOOR FRAMES ARE TO BE PAINTED TO MATCH EXISTING (PAINT COLOR P-4)

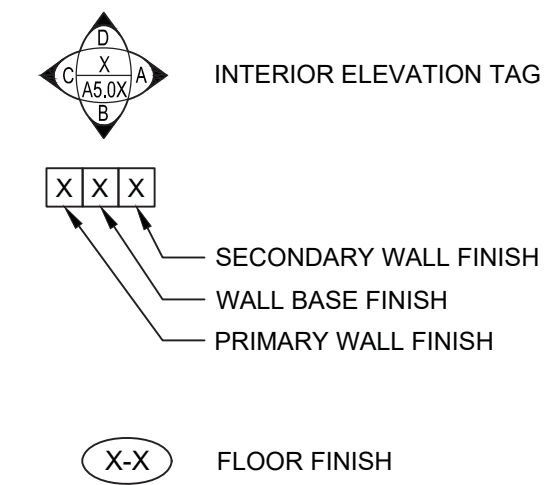

**BID SET**  
**08.07.2017**

REV	ISSUED FOR	DATE

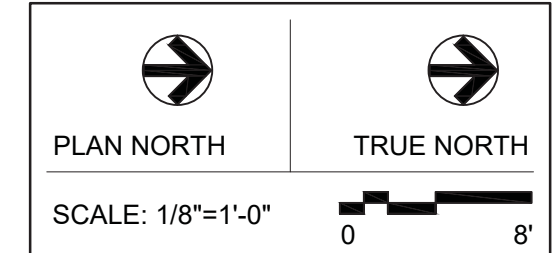

**WTA MOAB INTERIOR REMODEL**

WHATCOM TRANSPORTATION AUTHORITY

**FINISH PLAN, FINISH SCHEDULE & FINISH MATRIX**

PROJECT No: 201511.01  
 DRAWN BY: KG  
 CHECKED BY: SR  
 DATE ISSUED: 08/07/2017